



# PRODUCT SUPPLY PROPOSAL FOR CENTURY RUBBER PRODUCTS

Presented by: **B. K. SINGH**





# SUMMARY

---

Globomotive India Ltd. is a leading manufacturer and exporter of high-quality electrical and cable management solutions, offering a wide range of products to cater to diverse industrial needs. With a strong presence in domestic and international markets, we are committed to delivering excellence through innovation, reliability, and customer-centric service. We are an ISO 9001:2015 certified company, and our products comply with ROHS, CE, and UL standards, ensuring the highest level of safety and performance.



+91 9013526206



bksinghvip88@gmail.com



Plot No. 8/39, Devi Lal Nagar,  
Near Shiv Mandir, Gurgaon-122001 (HR)

# Wiring Open Rubber Grommets

**Material:** RUBBER, RoHS & REACH Approved



**Operating Temperature:** -20°C to +65°C

**Specifications:** Quality tested, heat resistant, fine finish.

The primary function of a wiring open grommet is to protect the insulation on electrical cables from chafing when the cable is passed through a metal plate. The component is intended for use only in a static, unloaded application.

It provides protection for wires and cables passing through panel holes. It is used to insulate wires, hoses, pipes, or other objects passing through a panel hole.

Used to ensure safety and flexibility in cable management systems.

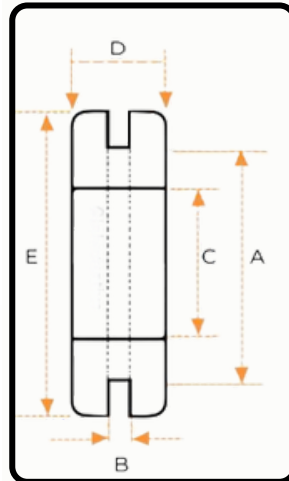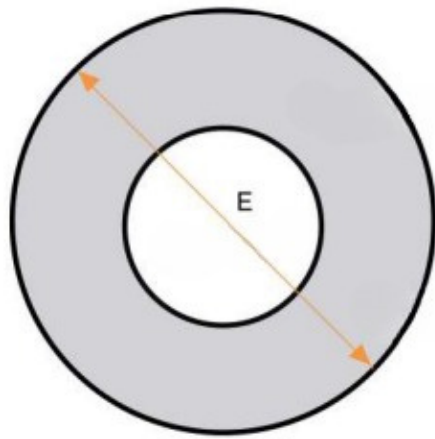

Item No	Colour	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
GW6	Black	6.4	1.6	4.0	3.8	8.5
GW9	Black	9.3	1.6	7.7	6.0	13.4
GW12	Black	12.3	1.6	9.5	6.4	16.2
GW16	Black	15.8	1.6	12.0	5.9	19.0
GW20	Black	20.2	1.6	15.8	6.2	23.0
GW25	Black	25.0	1.6	19.5	7.3	29.2
GW32	Black	31.0	1.6	24.0	8.0	38.1
GW36	Black	37.4	1.6	31.5	9.5	46.0
GW50	Black	50.5	1.6	44.5	11.1	60.3

# Blanking Closed Rubber Grommets


**Material:** RUBBER, RoHS & REACH Approved

**Operating Temperature:** -20°C to +65°C

**Specifications:** Quality tested, heat resistant, fine finish

The primary function of a blanking closed grommet is to block off unwanted holes in metal plates. The component is intended for use only in a static, unloaded application. Acts as a blanking plug for later insertion of wires and cables. Provides protection against dust and water.

Used to ensure safety and flexibility in cable management systems.

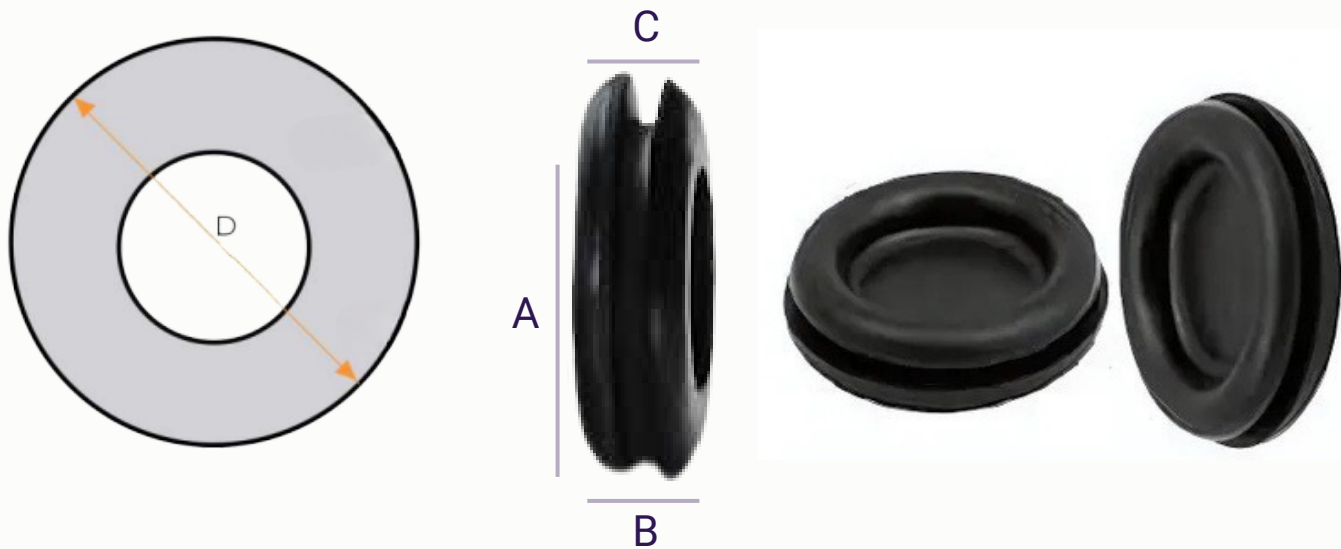

Item No	Colour	A (mm)	B (mm)	C (mm)	D (mm)
GB6	Black	6.4	1.6	3.8	8.5
GB9	Black	9.3	1.6	6.0	13.4
GB12	Black	12.3	1.6	6.4	16.2
GB16	Black	15.8	1.6	5.9	19.0
GB20	Black	20.2	1.6	6.2	24.2
GB25	Black	25.0	1.6	7.3	29.2
GB32	Black	31.0	1.6	7.2	38.1
GB38	Black	37.4	1.6	8.0	44.4
GB50	Black	50.5	1.6	7.3	57.2



# Cable Glands

**Material:** The cord grips are made from high-quality nylon PA66 plastic, widely used for cable fixing, wire splices, machinery control boxes, distribution panels, and electrical appliances, etc.

**Waterproof:** IP68 rating allows for underwater use. Resistant to salt water, weak acid, alcohol, oil, grease, and common solvents. Provides long-term protection for your indoor and outdoor applications.

**Widely Cable Size Range:** Supports cable ranges from 0.10–0.25 inch / 0.20–0.39 inch / 0.25–0.47 inch / 0.5–0.7 inch cable gland assortment.

**Reliable Quality:** Our waterproof cable gland has a longer lifespan, anti-oxidation properties, small shrinkage rate, and good toughness.

**Easy To Install:** You just need to thread the cable through the cable gland, then tighten up the sealing nut and lock nut. The cable will be tightly fixed without the need to disassemble.



PG 07




PG 09



PG 11



PG 13.5

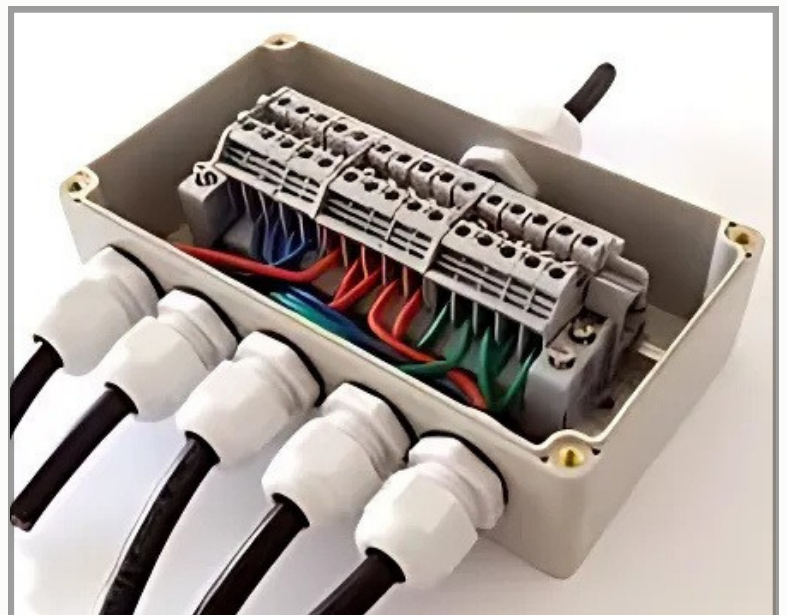



Wiring Open / Blanking Closed Rubber Grommets Use –



# O-ring

---

O-rings play a key role in sealing and cushioning in power tools, and there are certain requirements for their use, which can be considered from the following aspects:

## Material:

The material of the O-ring should be selected according to the working environment and conditions of the tool. For example, if the tool needs to be used in an environment of high temperature or chemicals, the O-ring should be made of a material that can withstand these conditions.

Common materials include:

nitrile rubber (NBR)

fluororubber (FKM/Viton)

silicone rubber (VMQ)

EPDM, etc.



# O-ring

---

Long-term Stability:

O-rings must maintain their properties over long periods of time, including shape retention, material stability, and tightness.

◆ Environmental Protection:


With strict environmental regulations, O-rings need to meet environmental protection requirements and must not contain substances harmful to the environment.

◆ Selection Guidance:

When selecting an O-ring, it is necessary to make a choice according to the specific type of power tool and the working environment. Moreover, regular maintenance and replacement are also important steps to ensure the normal operation of the tool.



# Silicone Rubber Parts Collection

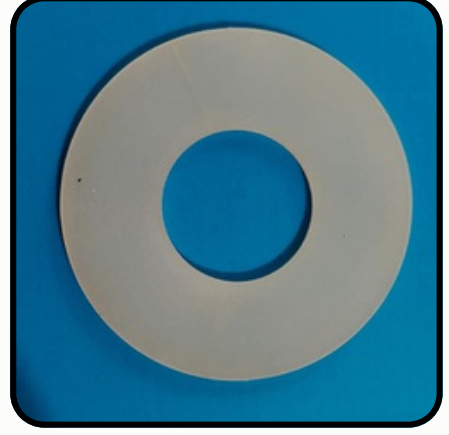



# Silicone Rubber Products





# Century Rubber Products

## Contact US



Plot No. 8/39, Devi Lal Nagar,  
Near Shiv Mandir, Gurgaon-  
122001 (HR)



bksinghvip88@gmail.com



+91 9013526206, +91 9354726778



[www.centuryrubberproducts.com](http://www.centuryrubberproducts.com)

**SCAN ME**



Scan & Pay Using  
PhonePe App